


TLA-000030G30



外形尺寸

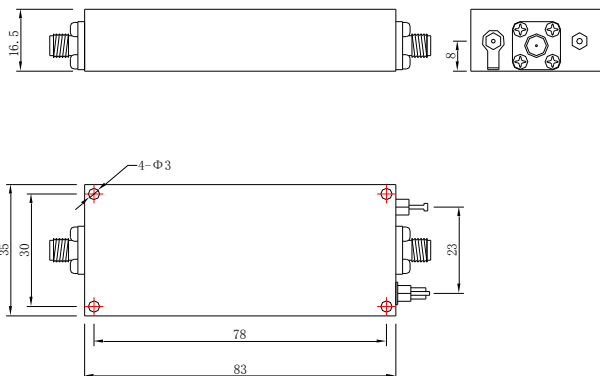

■ 频率范围	100kHz - 3.0GHz
■ 增益	30dB
■ P1dB	20dBm

技术指标@25℃

频率范围	0.1-3GHz
增益	30dB typ
增益平坦度	±2.0dB
P1dB	20dBm typ
输入驻波	2.0 :1
输出驻波	2.5 :1
电压	12V
电流 (最大值)	350mA
工作温度	-20℃ ~ 70℃
储存温度	-55℃ ~ 100℃
极限电压	15V
最大入口功率	-10dBm

订单描述

TLA-000030G30 指标特性

测试曲线 (Temp @+25℃)

