


## TLA-000200G28B



### 外形尺寸

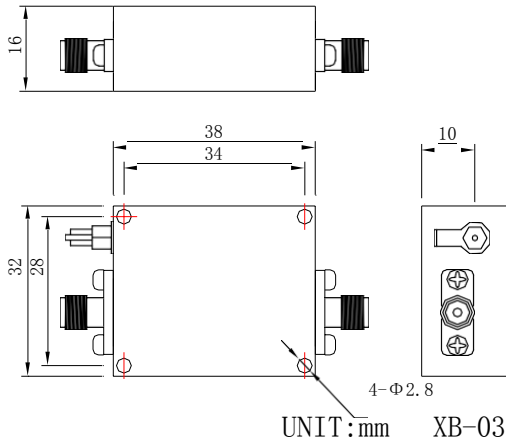

### 测试曲线 (Temp @+25°C)

■ 频率范围	0.05 - 20GHz
■ 增益	28dB typ
■ P1dB	15dBm typ
■ 噪声系数	2.8dB@10GHz typ

### 技术指标 @25°C

频率范围	0.05-20GHz
增益	28dB typ
增益平坦度	±2.5dB typ
噪声系数	2.8dB@10GHz typ
P1dB	15dBm
输入驻波	2.0 :1
输出驻波	2.0 :1
电压	12.0 V
电流	180mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
极限电压	13V
最大入口功率	-5dBm

### 订单描述

TLA-000200G28B

