



TLA-080160G35

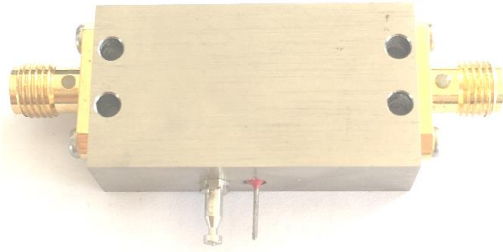

外形尺寸

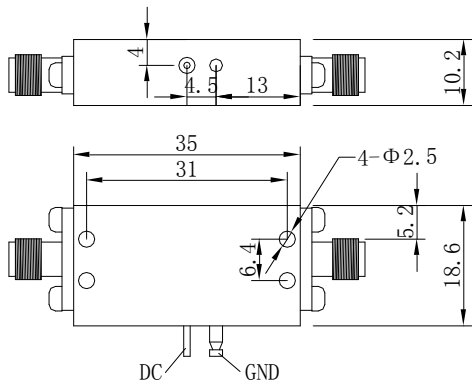

UNIT:mm XB-02A

| | |
|--------|-----------------|
| ■ 频率范围 | 8 - 16GHz |
| ■ 增益 | 35dB typ |
| ■ P1dB | 13dBm typ |
| ■ 噪声系数 | 2.2dB@10MHz typ |

技术指标@25°C

| | |
|--------|-----------------|
| 频率范围 | 8-16GHz |
| 增益 | 35dB typ |
| 增益平坦度 | ±2.5dB typ |
| 噪声系数 | 2.2dB@10MHz typ |
| P1dB | 13dBm typ |
| 输入驻波 | 2.5 :1 |
| 输出驻波 | 2.5 :1 |
| 电压 | 12.0V |
| 电流 | 200mA |
| 操作温度 | -40°C ~ 70°C |
| 储藏温度 | -55°C ~ 100°C |
| 极限电压 | 16V |
| 最大入口功率 | -15dBm |

订单描述

TLA-080160G35

指标特性

测试曲线 (Temp @+25°C)

