


## TLA-200400G40A



### 外形尺寸

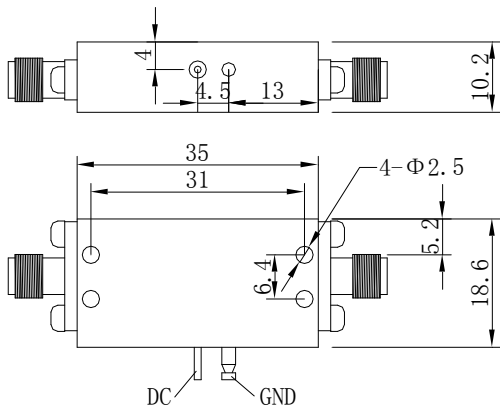

UNIT:mm XB-02A

### 测试曲线 (Temp @+25°C)

■ 频率范围	20 - 40GHz
■ 增益	40dB typ
■ P1dB	12dBm typ
■ 噪声系数	2.8dB typ

### 技术指标@25°C

频率范围	20-40GHz
增益	40dB typ
增益平坦度	±3.0dB typ
噪声系数	2.8dB typ
P1dB	12dBm typ
输入驻波	2.5 :1
输出驻波	2.5 :1
电压	12.0V
电流	150mA
操作温度	-20°C ~ 70°C
储藏温度	-55°C ~ 100°C
极限电压	13V
最大入口功率	-15dBm

### 订单描述

TLA-200400G40A

